Conveyor 22®
Clean Electrical Engineering

Quick Disconnect QD 360/390 of Sweden

Adjustable Quick Bracket with elevator for ECS-121 electric shaker conveyor

Quick Disconnect is designed for Quick change of electric shaker conveyor with tray

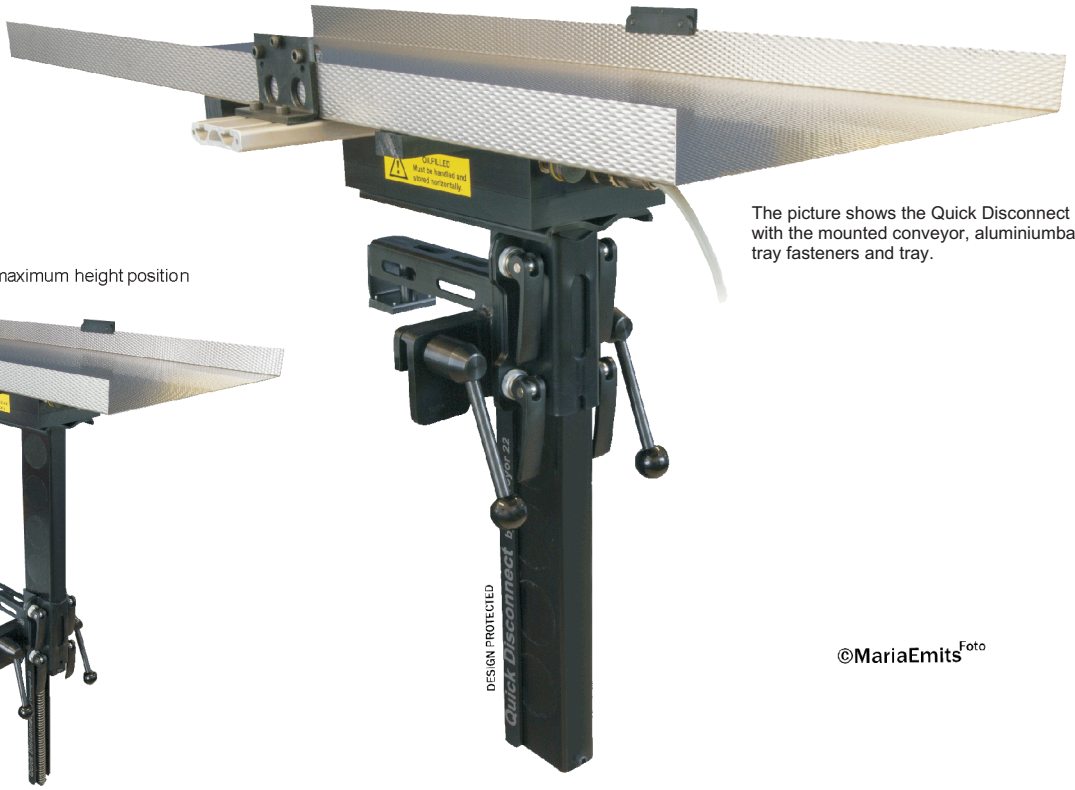

The picture shows the Quick Disconnect QD 390 with the mounted conveyor, aluminiumbar, tray fasteners and tray.

Quick Disconnect in the maximum height position

©MariaEmits Foto

Technical data

Material		**laser cut high strength steel**
Z elevator		**polyurethan filled steel bar**
Steel levers (*adjustable*)		**2 pcs**
Action tensioners (*adjustable*)		**4 pcs**
Bracket for bolster table edge (*adjustable*)		**9-11 mm**
Built in servo steel spring for easier handling		**1000 mm**
Full adjustable side ways		**(X angle)**
Full adjustable tray on the conveyor		**(Y angle)**
Stepless height adjustment	**390mm**	**(Z angle)**
The maximum weight of the Conveyor, Tray and attachments on Quick Disconnect QD 390		**50 KG**
Maximum attached weight on the Conveyor		**6 KG**
Weight of the Quick Disconnect 390		**9.8 Kg**
Dimensions (L x W x H)		**260 x 205 x 508 mm**

Postadress/Address:
Conveyor 22 AB
Gränumsvägen 390
293 93 Olofström, Sweden

Telefon/Phone:
+46 (0)454-432 21

E-mail:
kontakt@conveyor22.se

Internet:
www.conveyor22.se

Org nr/VAT no:
556881-0393
SE556881039301

© Conveyor 22 AB 2015-09-10